


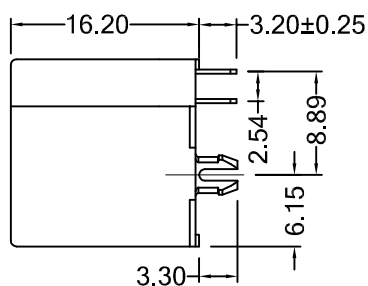


Part Number: 206



PCB Layout / Top View

MATERIAL & FINISH

Housing: PBT, UL94V-0, black
 Conductor: Phosphor bronze, t=0.35mm.
 Plating: Selective gold plating over nickel.
 Temperature: -40°C to 85°C
 Durability: 750 cycles min.

ORDERING INFORMATION

206 N 8P 8C **a** BK

Gold Plating
 06 - 06μ"
 15 - 15μ"
 30 - 30μ"
 50 - 50μ"

Category 6 Characteristic

Frequency	Near-End Cross Talk dB, min.	Return Loss dB, min.	Attenuation dB, max.
1.0 MHZ	75.0	35.5	0.1
4.0 MHZ	75.0	35.5	0.1
10.0 MHZ	74.0	35.5	0.1
16.0 MHZ	69.9	35.5	0.1
25.0 MHZ	66.0	35.5	0.1
31.25 MHZ	64.1	34.1	0.1
62.5 MHZ	58.1	28.1	0.1
100.0 MHZ	54.0	24.0	0.2
200.0 MHZ	48.0	18.0	0.3
2500 MHZ	46.0	16.0	0.3

Unit: m/m
 Tol.: ±0.25 unless otherwise stated



巨亮企業有限公司
 CHU LIANG ENTERPRISE CO.,LTD.
 TEL: 886-2-22023997 FAX: 886-2-22023867

E-mail: web@plug.com.tw
 peter@plug.com.tw
 WEB: http://www.plug.com.tw