


Part Number: 265A

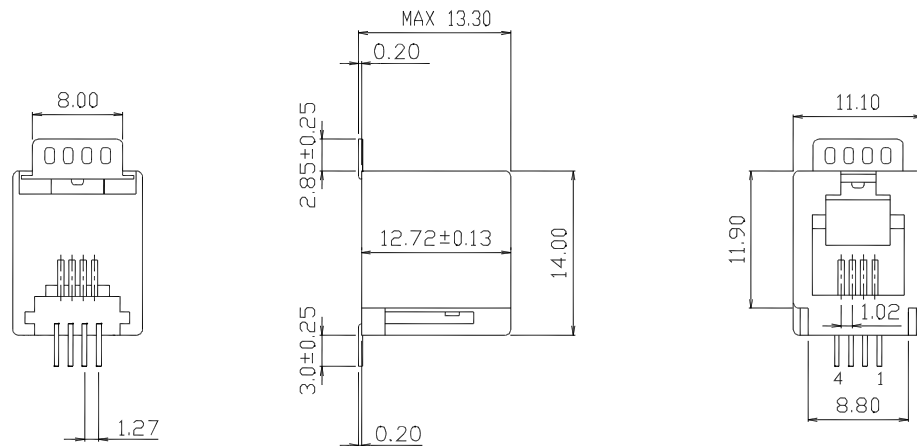

MATERIAL & FINISH


Housing: PA9T GN2230, UL94V-0, black

Insert: NYLON 46, UL94V-0, black

Conductor: 0.35mm thick phosphor bronze

Plating: Gold plated over nickel on contact area,
Tin plated over nickel on solder area.

Solder Nail: 0.35mm thick copper alloy with tin plated.

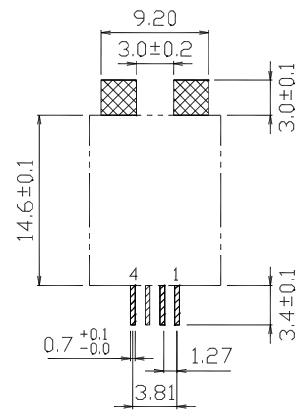

PCB LAYOUT / TOP VIEW

ORDERING INFORMATION

265A N 4P 4C a BK

Gold Plating
(06,15,30 or 50)μ"

UNIT: m / m

TOL.: +/- 0.10 unless otherwise stated



巨亮企業有限公司
CHU LIANG ENTERPRISE CO.,LTD.

TEL:886-2-22023997 FAX:886-2-22023867

E-mail: richard@plug.com.tw
peter@plug.com.tw

Web: http://www.plug.com.tw