


Part Number: S274
 Shielded
 Copper Plate with Mylar Inside

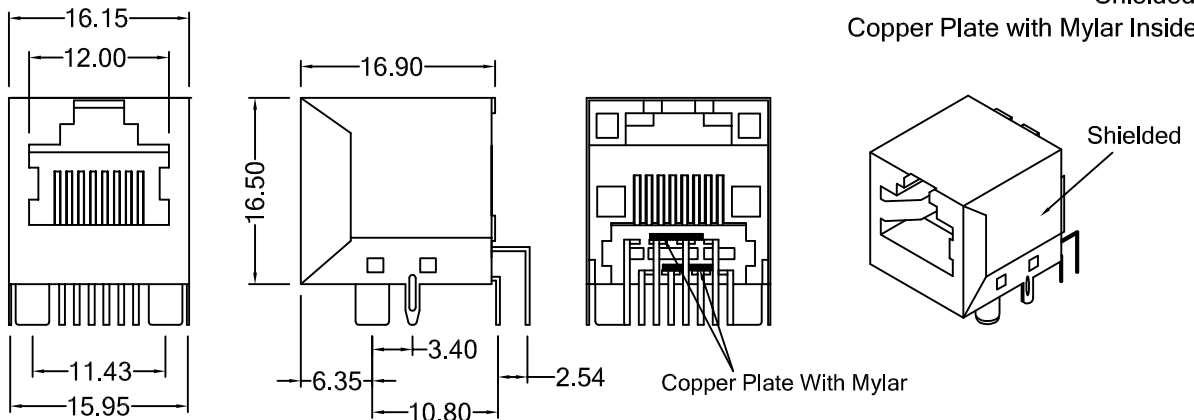


MATERIAL & FINISH

Housing & Insert: PBT, UL94V-0, black
 Conductor: 0.35 x 0.42 mm phosphor bronze,
 Gold plated over nickel on contact area,
 Tin plated over nickel on solder area.
 Shield: Brass with nickel plated.

ELECTRICAL

Voltage Rating: 125 V
 Current Rating: 1.5 A
 Contact Resistance: 30 milliohms max.
 Insulation Resistance: 500 megaohms min.
 Dielectric Withstanding Voltage: 1000 V

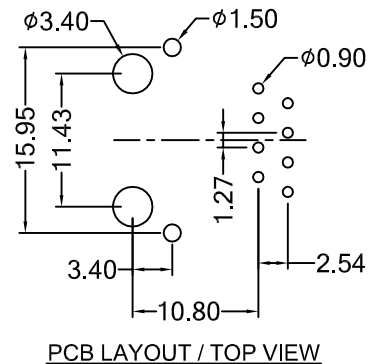

ORDERING INFORMATION

S 274 N 8P 8C a BK

Gold Plating
 06 - 06μ"
 50 - 50μ"

Unit: m/m
 Tol: ±0.15 unless otherwise stated



巨亮企業有限公司
 CHU LIANG ENTERPRISE CO.,LTD.
 TEL:886-2-22023997 FAX:886-2-22023867

E-mail: web@plug.com.tw
 peter@plug.com.tw
 Web: http://www.plug.com.tw