


Part Number: 7101A
Secondary Strain Relief Blocked

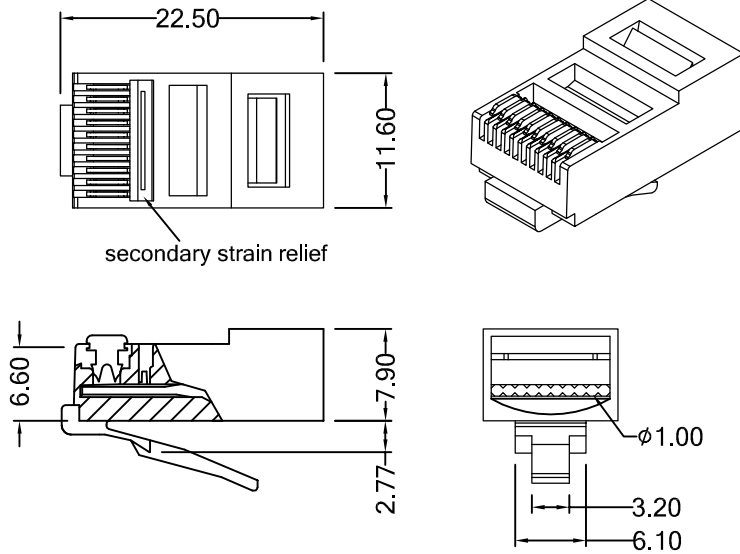

MATERIAL & FINISH

Body: PC. UL94V-2 or UL94V-0, clear
Contact: Copper alloy
Plating: Gold plated over 100 μ " nickel.



ELECTRICAL SPECIFICATIONS

Voltage: 125 VAC
Current: 1.5 A
Contact Resistance: 30 milliohms max.
Insulation Resistance: 500 megaohms min.
Dielectric Withstanding Voltage: 1000 VAC

MECHANICAL SPECIFICATIONS

Operating Temperature: -40°C to 85°C
Mating Cycles: 750 cycles min.

ORDERING INFORMATION

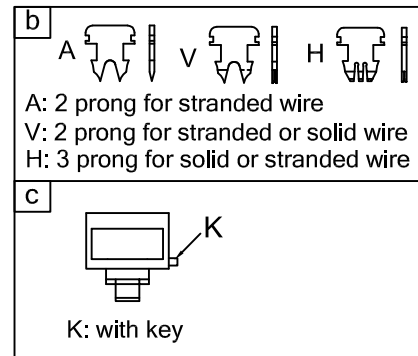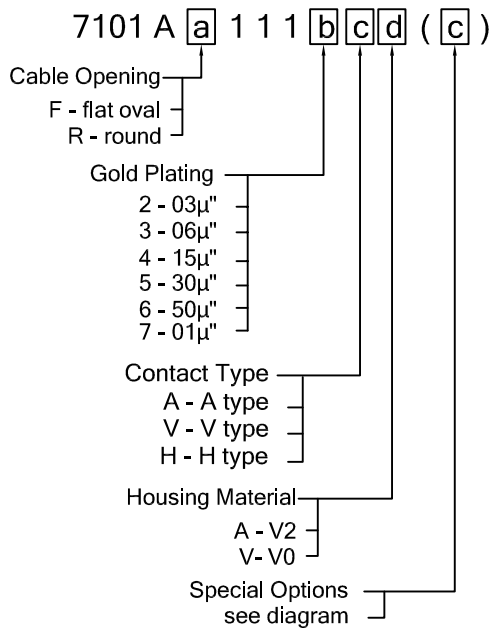

Unit: m/m
Tol: ± 0.15 unless otherwise stated



巨亮企業有限公司
CHU LIANG ENTERPRISE CO.,LTD.
TEL:886-2-22023997 FAX:886-2-22023867

E-mail: web@plug.com.tw
peter@plug.com.tw
WEB: http://www.plug.com.tw