


CL100 Series
Part Number: 7811

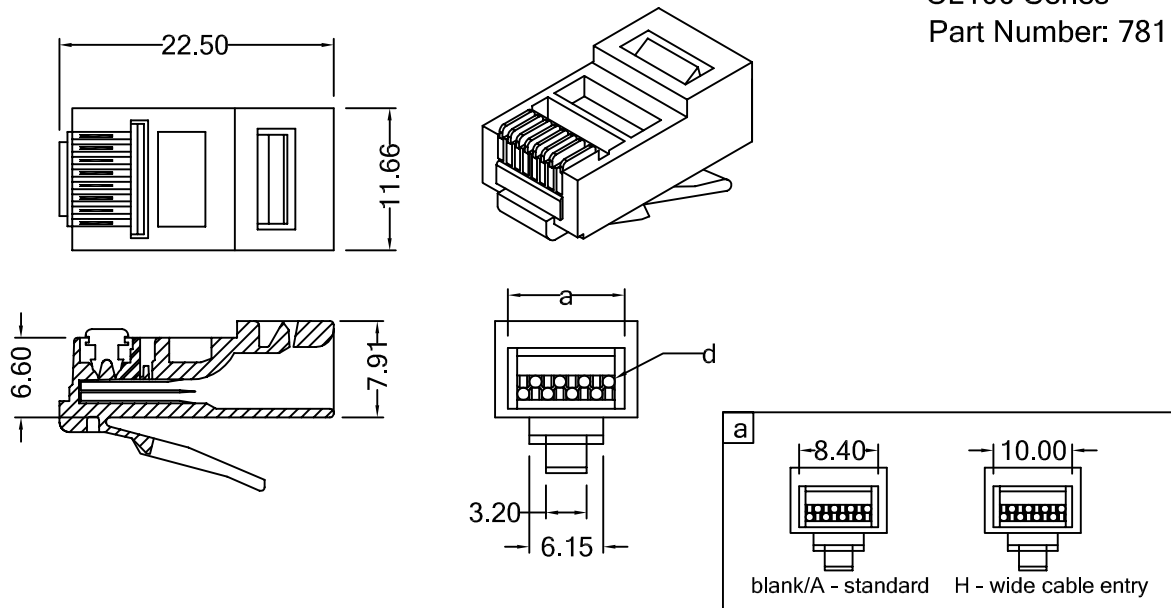

MATERIAL & FINISH




Body: Polycarbonate, UL94V-2, clean

Terminal: 0.35 mm thickness copper alloy, underplated with 100 uin Nickel, and plated with selective Gold in contact region and gold flash on remainder of terminal.

SPECIFICATION

Voltage Rating: 125 volts AC, at 1.5 amps.
Dielectric Withstanding Voltage: 1000 volts AC.
Insulation Resistance: 500 megaohms min.
Contact Resistance: 20 milliohms max.
Durability: 750 cycles.
Temp. Rating: -40°C to +85°C

ORDERING INFORMATION

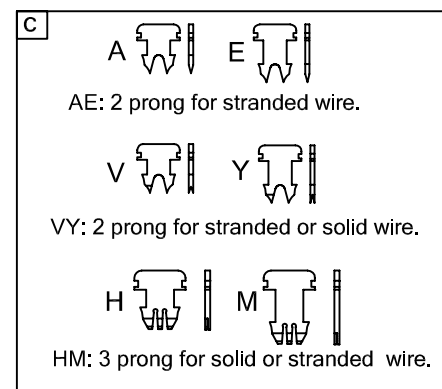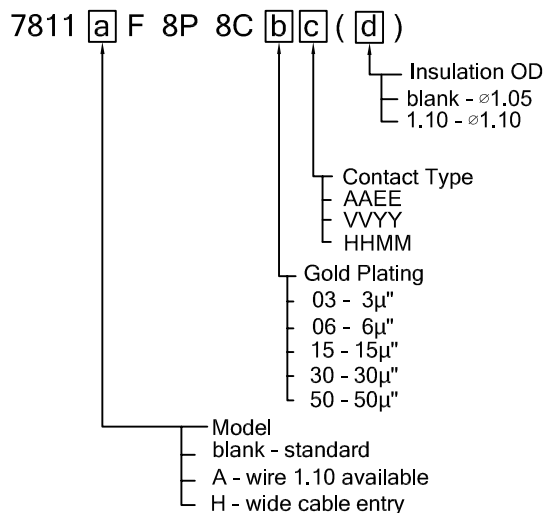

Unit: m/m
Tol: ± 0.15 unless otherwise stated



巨亮企業有限公司
CHU LIANG ENTERPRISE CO.,LTD.
TEL:886-2-22023997 FAX:886-2-22023867

E-mail: web@plug.com.tw
peter@plug.com.tw

WEB: http://www.plug.com.tw