


Part Number: 7823

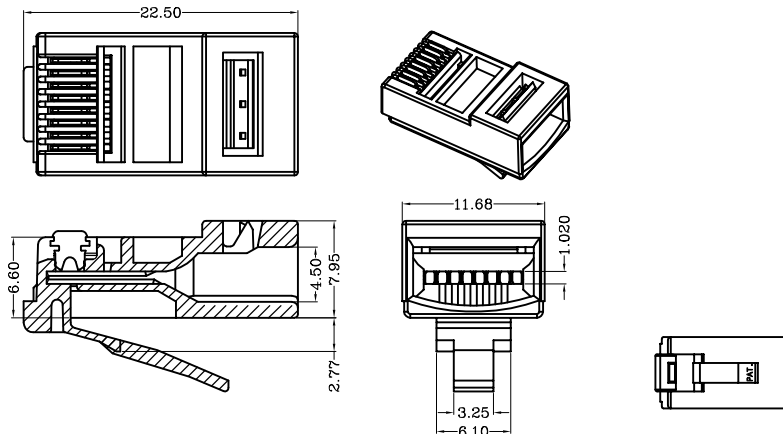

MATERIAL & FINISH

Body: PC. UL94V-2, or UL94V-0, clean

Contact: copper alloy, underplated 100uin Nickel, and gold plated on contact region.

ELECTRICAL SPECIFICATIONS

Voltage: 125 VAC

Current: 1.5 A

Contact Resistance: 30 milliohms max.

Insulation Resistance: 500 megaohms min.

Dielectric Withstanding Voltage: 1000 VAC


MECHANICAL SPECIFICATIONS

Operating Temperature: -40°C to 85°C

Mating Cycles: 750 cycles min.

ORDERING INFORMATION

7823	E	R	8	8	8	a	b	c	
						Gold Plating		Housing Material	
						7 - 01μ"		A - UL94V-2	
						8 - 03μ"		V - UL94V-0	
						9 - 06μ"		Contact Type	
						A - 15μ"		J	
						B - 30μ"		K	
						C - 50μ"			

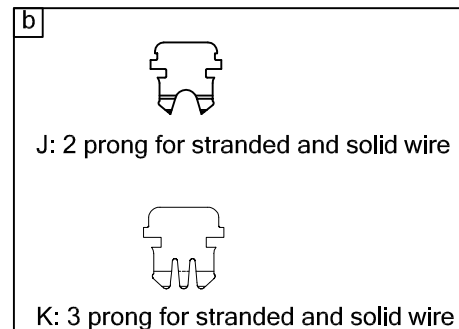

巨亮企業有限公司
CHU LIANG ENTERPRISE CO.,LTD.
TEL:886-2-22023997 FAX:886-2-22023867

E-mail: web@plug.com.tw
peter@plug.com.tw
Web: http://www.plug.com.tw