


Part Number: 7848

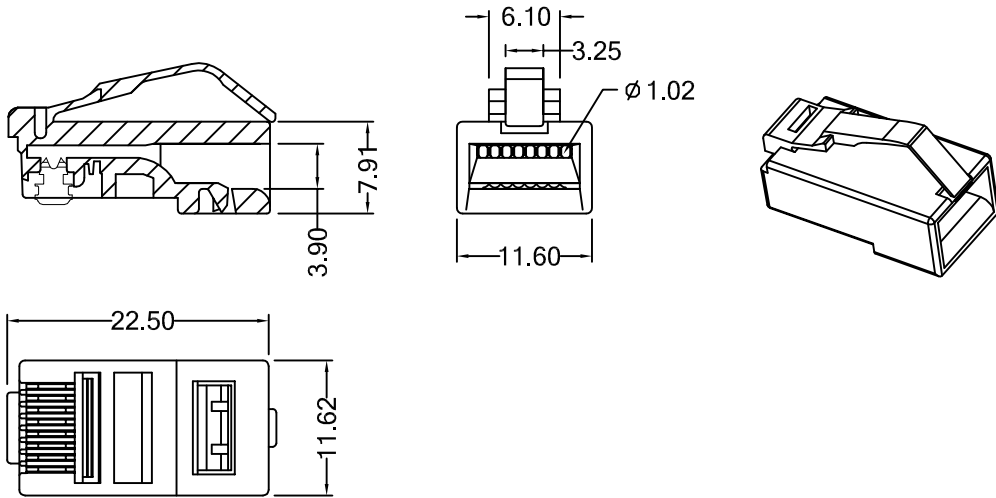

**MATERIAL & FINISH**



Body: PC. UL94V-2, clean  
 Contact: Copper alloy with gold plated.

**ELECTRICAL SPECIFICATIONS**


Voltage: 125 VAC  
 Current: 1.5 A  
 Contact Resistance: 30 milliohms max.  
 Insulation Resistance: 500 megaohms min.  
 Dielectric Withstanding Voltage: 1000 VAC

**MECHANICAL SPECIFICATIONS**

Operating Temperature: -40°C to 85°C  
 Mating Cycles: 750 cycles min.

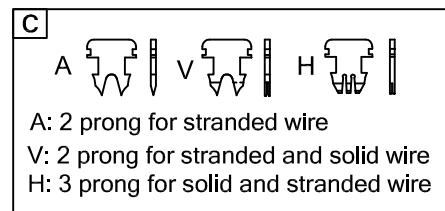

**ORDERING INFORMATION**

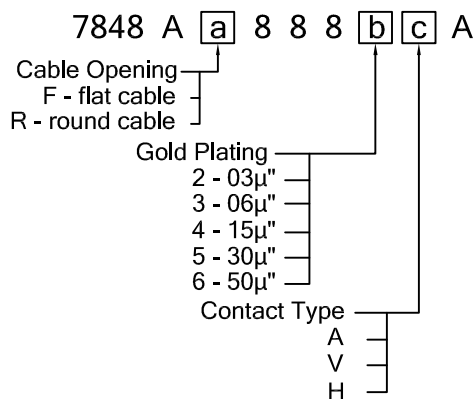

Unit: m/m  
 Tol: ±0.15mm unless otherwise stated.



巨亮企業有限公司  
 CHU LIANG ENTERPRISE CO.,LTD.  
 TEL:886-2-22023997 FAX:886-2-22023867

E-mail: web@plug.com.tw  
 peter@plug.com.tw  
 Web: http://www.plug.com.tw