



S7801

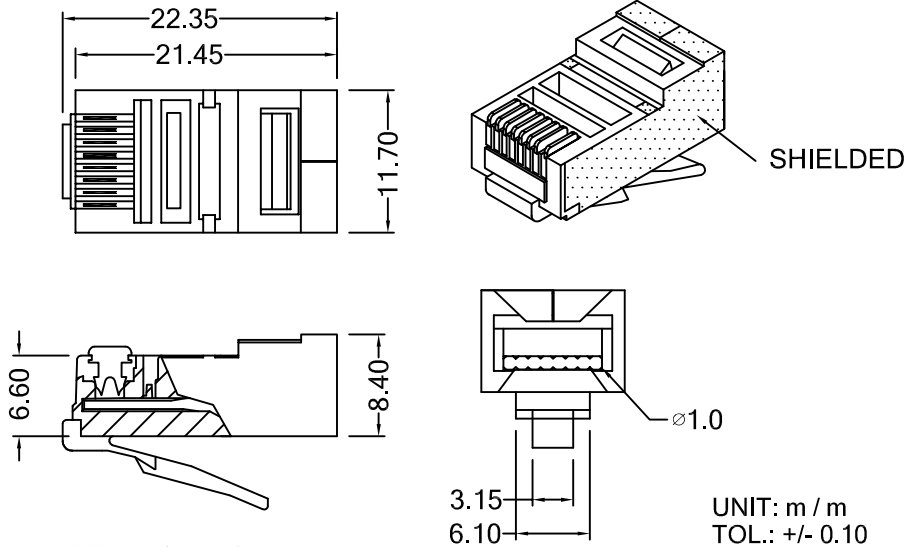

**MATERIAL & FINISH**

Body: PC. UL94V-2 or UL94V-0, clean  
 Contact: copper alloy, Selective gold plated.  
 Shield: bronze plated nickel.

**ORDERING INFORMATION**

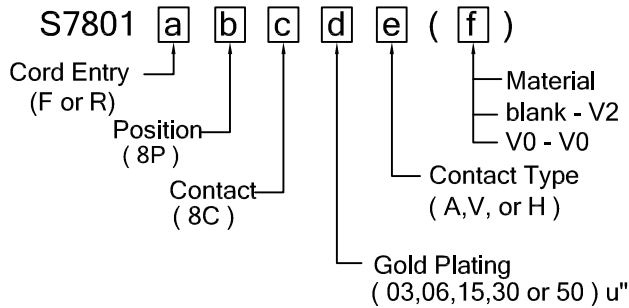

UNIT: m / m  
 TOL.: +/- 0.10

|          |                                                                                                                                                                                           |                |
|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| <b>a</b> |                                                                                                                                                                                           |                |
|          | F: flat oval cable                                                                                                                                                                        | R: round cable |
| <b>e</b> |                                                                                                                                                                                           |                |
|          | <p>A: 2 prong for stranded wire (2腳多心線)<br/>                 V: 2 prong for stranded or solid wire (2腳多心線或單心線)<br/>                 H: 3 prong for solid or stranded wire (3腳單心線或多心線)</p> |                |



巨亮企業有限公司  
**CHU LIANG ENTERPRISE CO.,LTD.**  
 TEL:886-2-22023997 FAX:886-2-22023867 Web: <http://www.plug.com.tw>

E-mail: [richard@plug.com.tw](mailto:richard@plug.com.tw)  
[peter@plug.com.tw](mailto:peter@plug.com.tw)